$CARLTON^{\scriptscriptstyle TM}\;FAMILY$

The Carlton Family, interior light fixtures that are substantial yet understated, perfect for traditional residential or commercial spaces. The Carlton was inspired by a 1905 Milwaukee lakefront mansion lighting fixture.









brasslightgallery.com 800-243-9595 sales@brasslight.com

CN-200-A4




















































CARLTON™ ONE LIGHT STRAIGHT ARM SCONCE

WITH 2-1/4" SHADE HOLDER

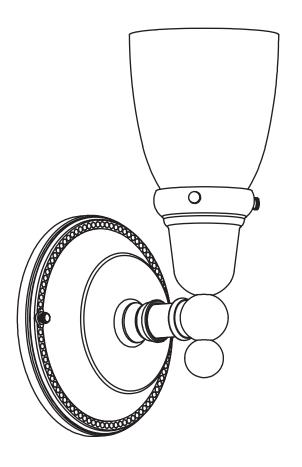



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-200-A4 shown with A157 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 2-1/4" shades.

Center mount to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.








CARLTON™ ONE LIGHT STRAIGHT ARM SCONCE

WITH 3-1/4" SHADE HOLDER

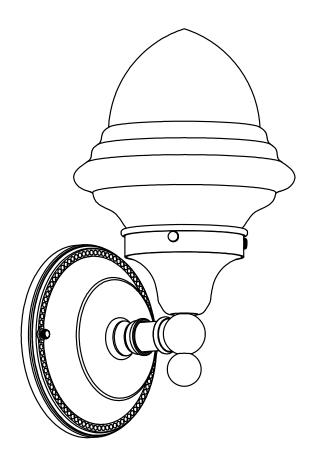



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-200-A5 shown with B141 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 3-1/4" shades.


Center mount to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.








CARLTON™ ONE LIGHT STRAIGHT ARM SCONCE

WITH ELECTRIC CANDLE

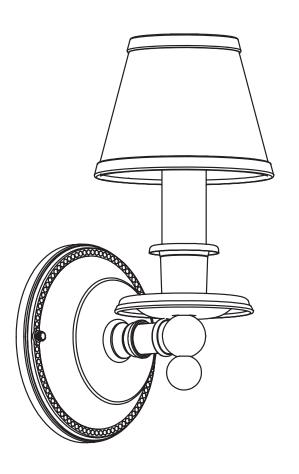



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-200-B7 shown with E231 shade

Medium base screw-in socket (1) accepts 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.

Check our website for alternative clip-on shades.


Center mount to junction box.

Mount candle up.

UL listed dry location.

Durably constructed of solid brass.








CARLTON™ TWO LIGHT STRAIGHT ARM SCONCE

WITH 2-1/4" SHADE HOLDERS

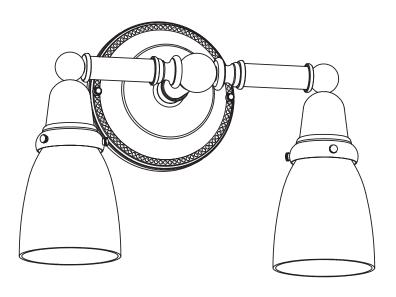



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-201-A4 shown with A157 shade

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 2-1/4" shades.


Center mount to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.








CARLTON™ TWO LIGHT STRAIGHT ARM SCONCE

WITH 3-1/4" SHADE HOLDERS

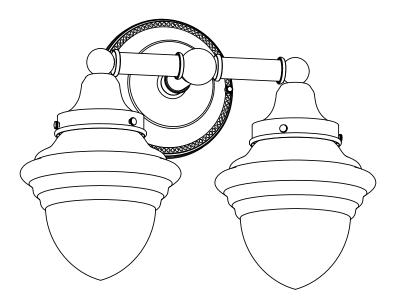



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-201-A5 shown with B141 shade

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 3-1/4" shades.


Center mount to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.








CARLTON™ TWO LIGHT STRAIGHT ARM SCONCE

WITH ELECTRIC CANDLES

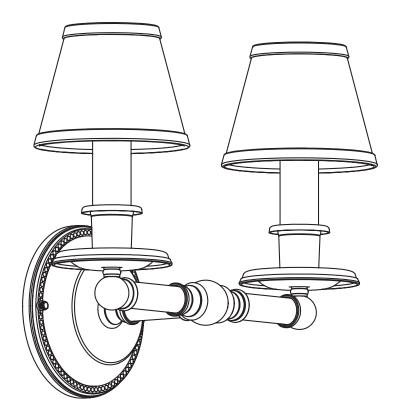



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-201-B7 shown with E231 shade

Medium base screw-in sockets (2) each accept 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative clip-on shades.


Center mount to junction box.

Mount candle up.

UL listed dry location.

Durably constructed of solid brass.








CARLTON™ THREE LIGHT STRAIGHT ARM SCONCE

WITH 2-1/4" SHADE HOLDERS

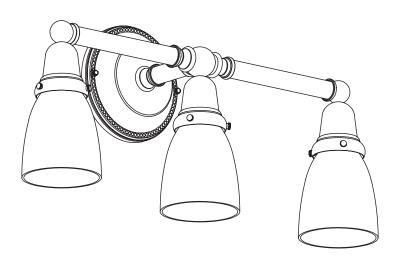



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-199-A4 shown with A157 shade

Medium base screw-in sockets (3) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 2-1/4" shades.


Center mount to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.








CARLTON™ THREE LIGHT STRAIGHT ARM SCONCE

WITH 3-1/4" SHADE HOLDERS

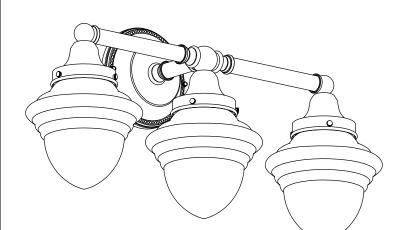



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-199-A5 shown with B141 shade

Medium base screw-in sockets (3) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 3-1/4" shades.


Center mount to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.








CARLTON™ ONE LIGHT CURVED ARM SCONCE

WITH 2-1/4" SHADE HOLDER

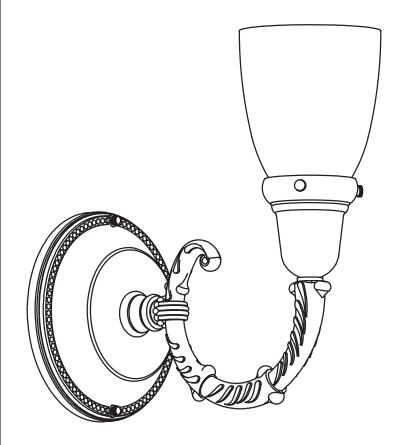



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-202-A4 shown with A157 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 2-1/4" shades.


Center mount to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.








CARLTON™ ONE LIGHT CURVED ARM SCONCE

WITH 3-1/4" SHADE HOLDER

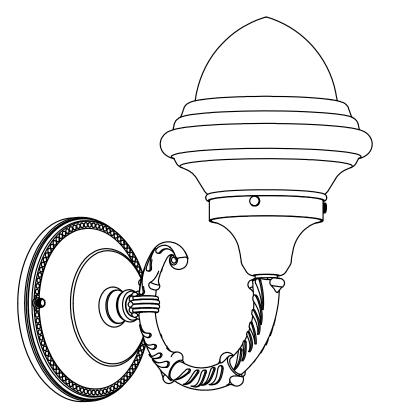



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-202-A5 shown with B141 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 3-1/4" shades.


Center mount to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.








CARLTON™ ONE LIGHT CURVED ARM SCONCE

WITH ELECTRIC CANDLE

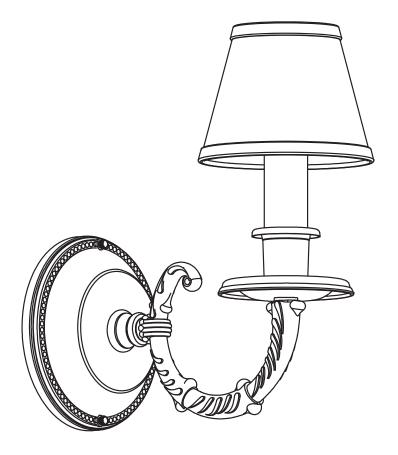



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-202-B7 shown with E231 shade

Medium base screw-in socket (1) accepts 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative clip-on shades.


Center mount to junction box.

Mount candle up.

UL listed dry location.

Durably constructed of solid brass.








CARLTON™ ONE LIGHT TORCH SCONCE

WITH 2-1/4" SHADE HOLDER

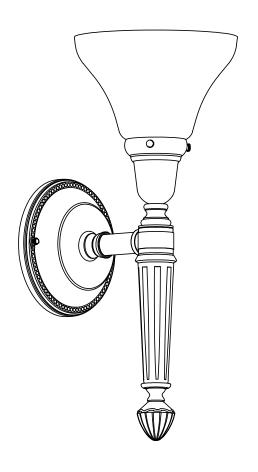



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 2-1/4" shades.


Center mount to junction box.

Mount up only.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.








CARLTON™ ONE LIGHT TORCH SCONCE

WITH 3-1/4" SHADE HOLDER

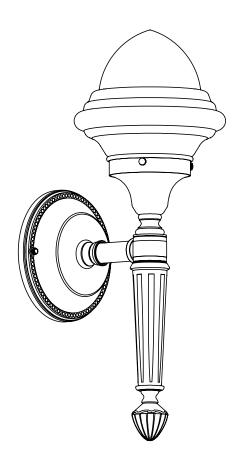




FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel

Architectural Bronze Verdigris Patina **Distressed Brass** Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-210-A5 shown with B311 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 3-1/4" shades.

Center mount to junction box.

Mount up only.

UL listed dry location. Damp location available, inquire.


Durably constructed of solid brass.





CARLTON™ ONE LIGHT TORCH SCONCE

WITH ELECTRIC CANDLE

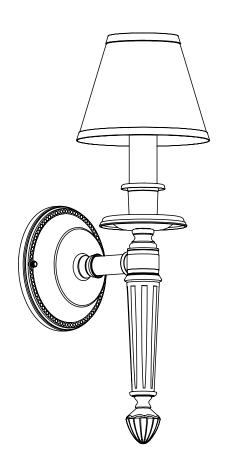






FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black **Brushed Brass** Polished Brass Antique Nickel Vintage Nickel

Architectural Bronze Verdigris Patina **Distressed Brass** Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron







CN-210-B7 shown with E244 shade

Medium base screw-in socket (1) accepts 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.

Check our website for alternative clip-on shades.

Center mount to junction box.


Mount candle up.

UL listed dry location.

Durably constructed of solid brass.



WITH 2-1/4" SHADE HOLDER

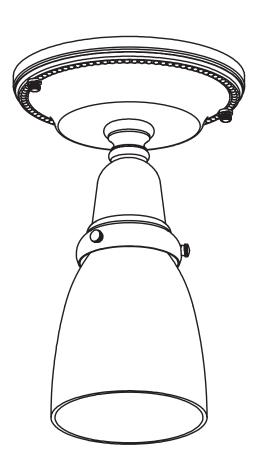



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-403-A4-01M shown with A157 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 2-1/4" shades.

Center mount to junction box.

Angled ceiling version available, inquire.


UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





WITH 3-1/4" SHADE HOLDER

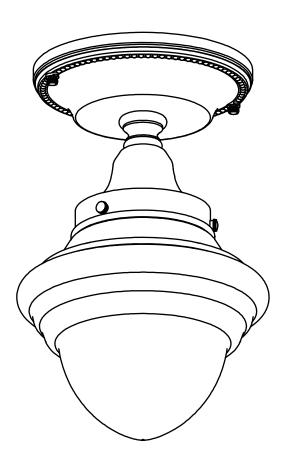



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-403-A5-01M shown with B141 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 3-1/4" shades.

Center mount to junction box.

Angled ceiling version available, inquire.


UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





WITH 4-1/4" SHADE HOLDER

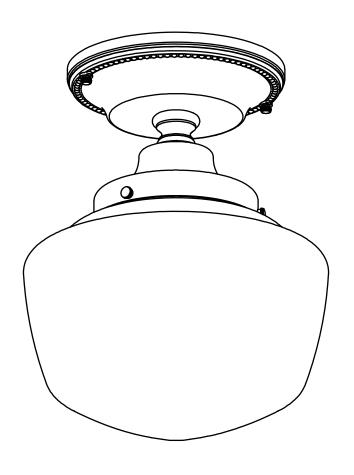



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-403-A6-01M shown with C300 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 4-1/4" shades.

Center mount to junction box.

Angled ceiling version available, inquire.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





WITH 6-1/4" SHADE HOLDER





FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-403-A8-01M shown with D303 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Alternative 6-1/4" shades are available.

Center mount to junction box.


Angled ceiling version available, inquire.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





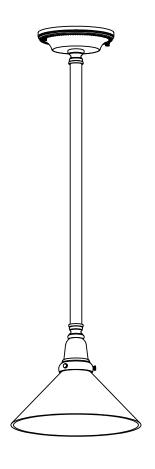

CARLTON™ ONE LIGHT PENDANT



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-415-A4-03M shown with A384 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.

Check our website for alternative 2-1/4" shades.


Center mount to junction box.

Specify overall length. Minimum overall length 11".


Angled ceiling version available, inquire.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





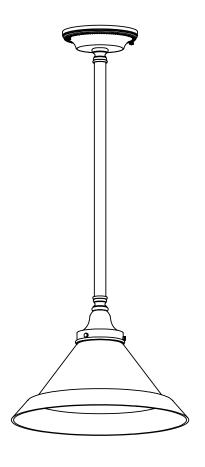



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-415-A5-03M shown with B409 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.

Check our website for alternative 3-1/4" shades.


Center mount to junction box.

Specify overall length. Minimum overall length 11".


Angled ceiling version available, inquire.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





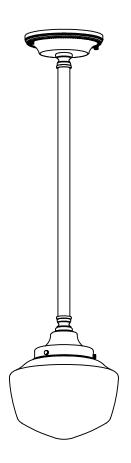



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-415-A6-03M shown with C300 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.

Check our website for alternative 4-1/4" shades.


Center mount to junction box.

Specify overall length. Minimum overall length 13".


Angled ceiling version available, inquire.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





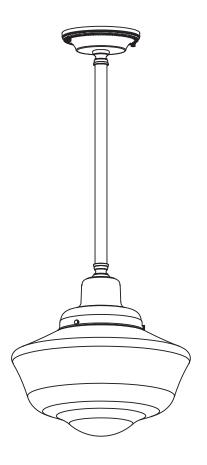

CARLTON™ ONE LIGHT PENDANT



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-415-A8-03M shown with D303 shade

Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.

Check our website for alternative 6-1/4" shades.


Center mount to junction box.

Specify overall length. Minimum overall length 14".


Angled ceiling version available, inquire.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





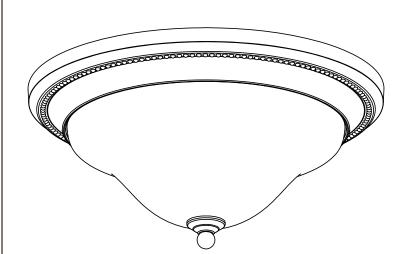



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-419-01M


Candelabra base screw-in sockets (2) each accept 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.

Center mount to junction box.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





WITH 2-1/4" SHADE HOLDERS





FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-433-A4-03M shown with A157 shade

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 2-1/4" shades.

Center mount to junction box.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.







WITH 3-1/4" SHADE HOLDERS





FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-433-A5-03M shown with B141 shade

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.


Check our website for alternative 3-1/4" shades.

Center mount to junction box.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.







CARLTON™ SIX LIGHT CHANDELIER



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-481-E2-05M

Candelabra base screw-in sockets (6) each accept 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket, inquire.

Check our website for alternative clip-on shades.

Center mount to junction box.

Specify overall length. Minimum overall length 18".

UL listed dry location.

Durably constructed of solid brass.

