MORRISTM FAMILY

Light xture design inspired by William Morris, a founder of the Arts & Cra s movement. Clean, durable castings evoke one of the hallmarks of the movement in simplicity of form, without super uous decoration.









INTERIOR LIGHTING FIXTURES



CN-105-D9


























CN-177-K8

CN-178-A4



































MORRIS™ ONE LIGHT CURVED ARM SCONCE


WITH 2-1/4" SHADE HOLDER

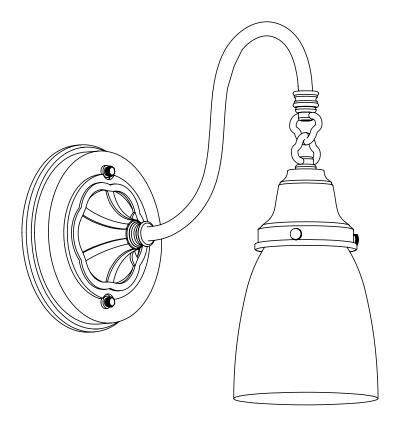



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-105-D9 Shown with A157 shade(s)

Medium base screw-in sock et (1) accepts 150 W max incandescent, compact fluorescent, or LED.


GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire. Check our website for alternative 2-1/4" shades.

Mounting plate center mounts to junction box.

Mount down only.


UL listed dry location.

Durably constructed of solid brass.





WITH 2-1/4" SHADE HOLDER

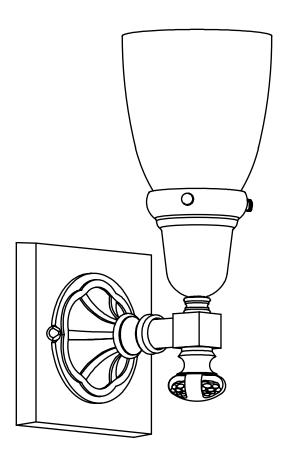



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-176-A4 Shown with A157 shade(s)

Medium base screw-in sock et (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.


Durably constructed of solid brass.







WITH ELECTRIC CANDLE

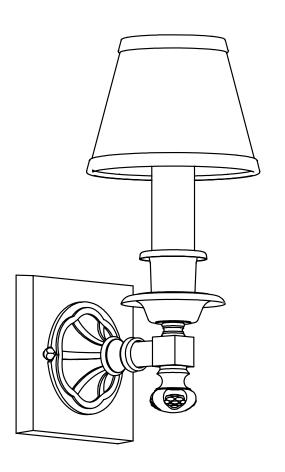



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-176-K1 Shown with E231 shade(s)

Medium base screw-in sock et (1) accepts 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check online for alternative clip-on shades rated at 40 to $100\ \text{watts}$ with this fixture.


Mounting plate center mounts to junction box.

Mount candle up.

UL listed dry location.


Durably constructed of solid brass.








WITH 3-1/4" SHADE HOLDER

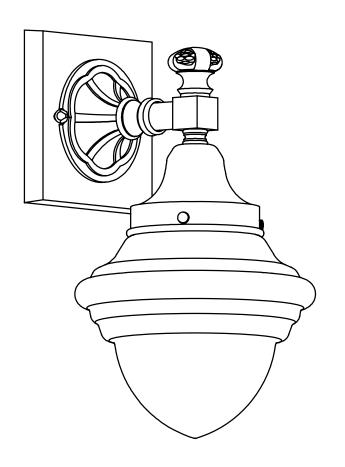



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-176-A5 Shown with B141 shade(s)

Medium base screw-in sock et (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check our website for alternative 3-1/4" shades.

Mounting plate center mounts to junction box.

Mount glass up or glass down.


UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





WITH O-RING SHADE HOLDER

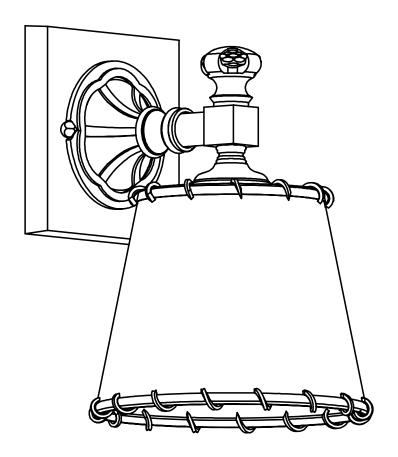



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-176-K8 Shown with R531 shade(s)

Medium base screw-in sock et (1) accepts 60 W max incandescent, compact fluorescent, or LED.


GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.

Mounting plate center mounts to junction box.

Mount down only.


Durably constructed of solid brass.







WITH 2-1/4" SHADE HOLDERS

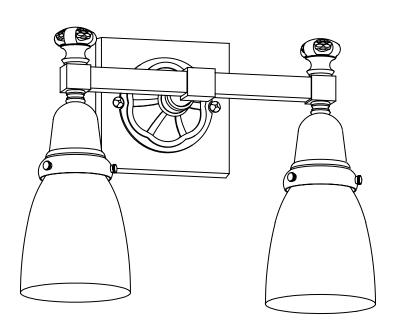



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-177-A4 Shown with A157 shade(s)

Medium base screw-in sockets (2) each accept $150~\mathrm{W}$ max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.


Durably constructed of solid brass.







WITH 3-1/4" SHADE HOLDERS

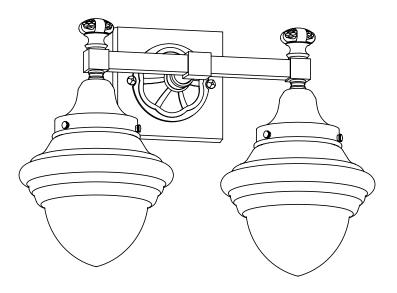



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-177-A5 Shown with B141 shade(s)

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check our website for alternative 3-1/4" shades.


Mounting plate center mounts to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.


Durably constructed of solid brass.








WITH ELECTRIC CANDLES

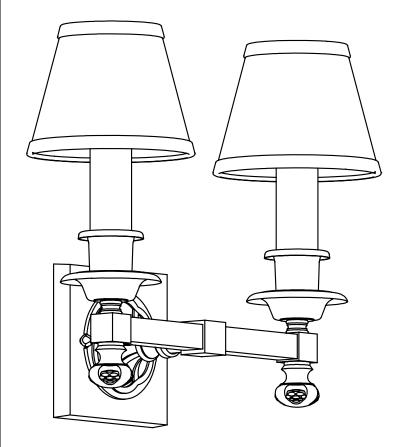



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-177-K1 Shown with E231 shade(s)

Medium base screw-in sockets (2) each accept 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.

Mounting plate center mounts to junction box.

Mount candle up.


UL listed dry location.

Durably constructed of solid brass.





WITH O-RING SHADE HOLDERS

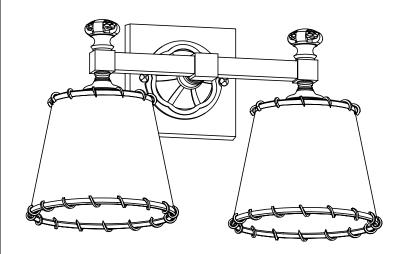



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-177-K8 Shown with R531 shade(s)

Medium base screw-in sockets (2) each accept 60 W max incandescent, compact fluorescent, or LED.


GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check online for alternative clip-on shades rated at 40 to $100\ \text{watts}$ with this fixture.

Mounting plate center mounts to junction box.

Mount down only.


Durably constructed of solid brass.







WITH 2-1/4" SHADE HOLDERS

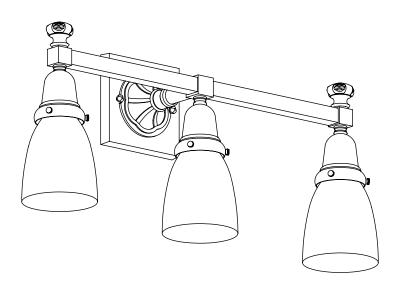



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-178-A4 Shown with A157 shade(s)

Medium base screw-in sockets (3) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Mount glass up or glass down.


UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.

Made in USA by Brass Light Gallery.




7.0"

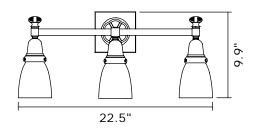



WITH 3-1/4" SHADE HOLDERS

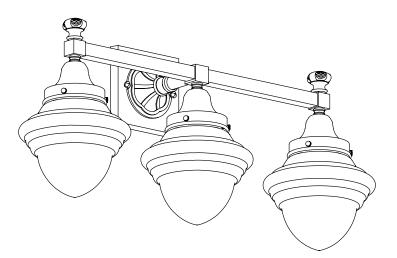



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

8.3"

6.6"

CN-178-A5 Shown with B141 shade(s)

Medium base screw-in sockets (3) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check our website for alternative 3-1/4" shades.

Mounting plate center mounts to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.


Durably constructed of solid brass.

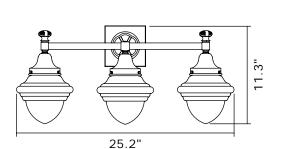



MORRIS™ TWO LIGHT LINEAR SCONCE


WITH 2-1/4" SHADE HOLDERS

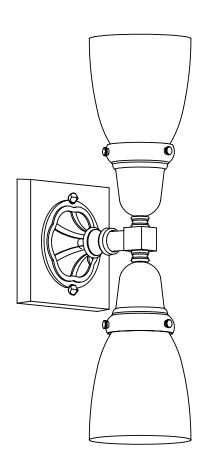



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-179-A4 Shown with A157 shade(s)

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

 $\mbox{GU24 base} \mbox{ bi-pin socket a vailable. 277V } \mbox{4 pin sock et alternative, inquire.}$


Check our website for alternative 2-1/4" shades.

Mounting plate center mounts to junction box.

Mount horizontally or vertically.

UL listed dry location. Damp location available, inquire.


Durably constructed of solid brass.





MORRIS™ ONE LIGHT SEMI FLUSH CEILING FIXTURE

WITH 2-1/4" SHADE HOLDER

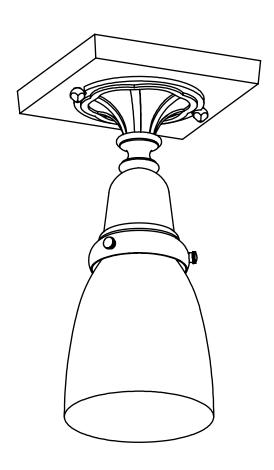



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-521-A4 Shown with A157 shade(s)

Medium base screw-in sock et (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check our website for alternative 2-1/4" shades.

Mounting plate center mounts to junction box.

Angled ceiling version available, inquire.

UL listed dry location. Damp location available, inquire.


Durably constructed of solid brass.





MORRIS™ ONE LIGHT SEMI FLUSH CEILING FIXTURE

WITH 3-1/4" SHADE HOLDER

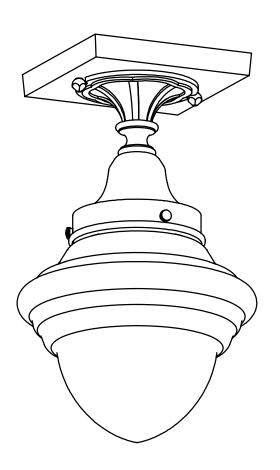



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron

CN-521-A5 Shown with B141 shade(s)

Medium base screw-in sock et (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.


Check our website for alternative 3-1/4" shades.

Mounting plate center mounts to junction box.

Angled ceiling version available, inquire.

UL listed dry location. Damp location available, inquire.


Durably constructed of solid brass.





MORRIS™ ONE LIGHT PENDANT


WITH 2-1/4" SHADE HOLDER

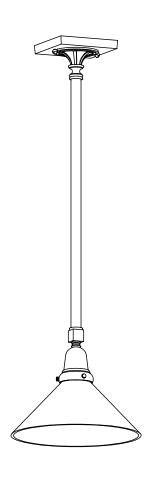



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-522-A4-03M Shown with A384 shade(s)

Medium base screw-in sock et (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 12".

Angled ceiling version available, inquire.


UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.





WITH 2-1/4" SHADE HOLDERS DOWN

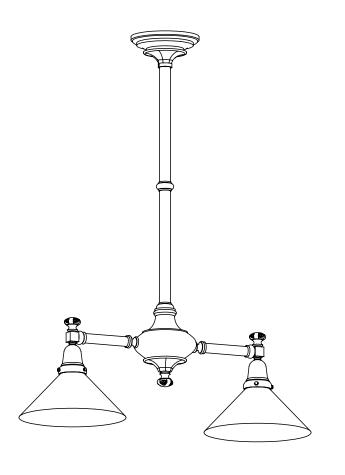



Medium base screw-in sockets (2) each accept $150~\mathrm{W}$ max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check our website for alternative 2-1/4" shades.

Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 17".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.


Made in USA by Brass Light Gallery.



FINISHES - applied by hand.


Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron








WITH 2-1/4" SHADE HOLDERS UP

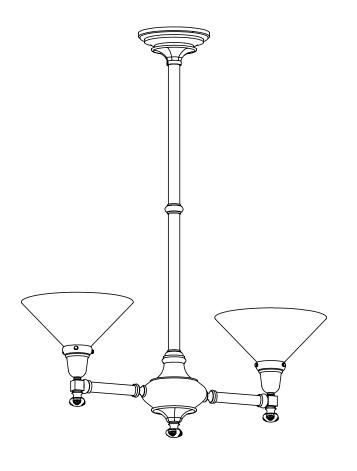

FINISHES - applied by hand.

Handmade in USA

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-523-A4-09M Shown with A384 shade(s)

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 15".

Angled ceiling version available, inquire.


UL listed dry location.

Durably constructed of solid brass.






WITH 3-1/4" SHADE HOLDERS DOWN

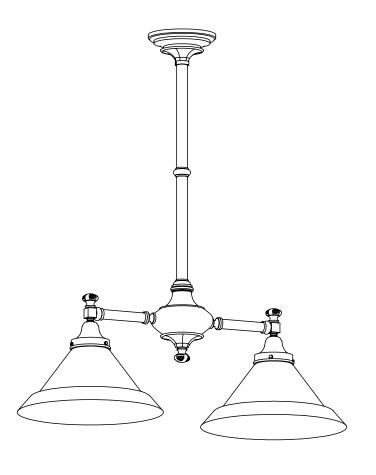



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-523-A5-03M Shown with B409 shade(s)

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check our website for alternative 3-1/4" shades.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 17".

Angled ceiling version available, inquire.


UL listed dry location.

Durably constructed of solid brass.





WITH 3-1/4" SHADE HOLDERS UP

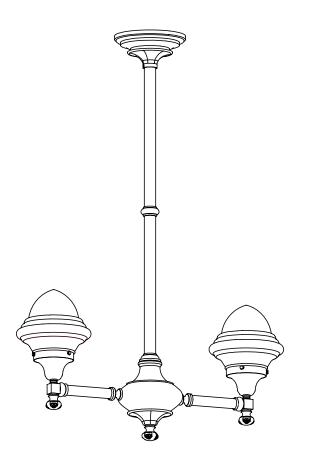



Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check our website for alternative 3-1/4" shades.

Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 15".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.


Made in USA by Brass Light Gallery.



FINISHES - applied by hand.


Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron







WITH ELECTRIC CANDLES

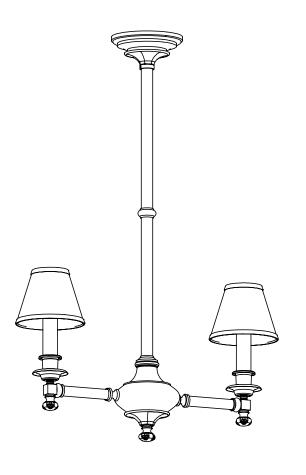

CN-523-K2-09M Shown with E210 shade(s)

Medium base screw-in sockets (2) each accept 60 W max incandescent, compact fluorescent, or LED.

 $\mbox{GU24 base} \mbox{ bi-pin socket a vailable. 277V } \mbox{4 pin sock et alternative, inquire.}$

Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.

Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 19".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.


Made in USA by Brass Light Gallery.



FINISHES - applied by hand.


Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron








WITH 2-1/4" SHADE HOLDERS DOWN

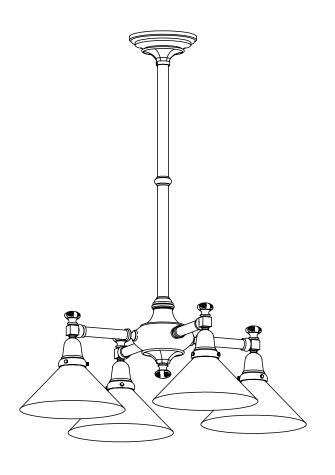



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-524-A4-03M Shown with A384 shade(s)

Medium base screw-in sockets (4) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 17".

Angled ceiling version available, inquire.


UL listed dry location.

Durably constructed of solid brass.






WITH 2-1/4" SHADE HOLDERS UP

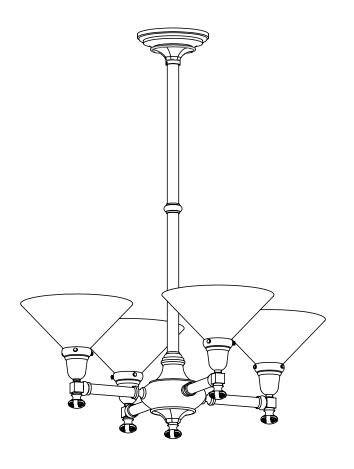



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-524-A4-09M Shown with A384 shade(s)

Medium base screw-in sockets (4) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 15".

Angled ceiling version available, inquire.

UL listed dry location.

Durably constructed of solid brass.






WITH ELECTRIC CANDLES





FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-524-K2-09M Shown with E210 shade(s)

Medium base screw-in sockets (4) each accept 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 19".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.





MORRIS™ TWO LIGHT PENDANT

WITH 2-1/4" SHADE HOLDERS DOWN

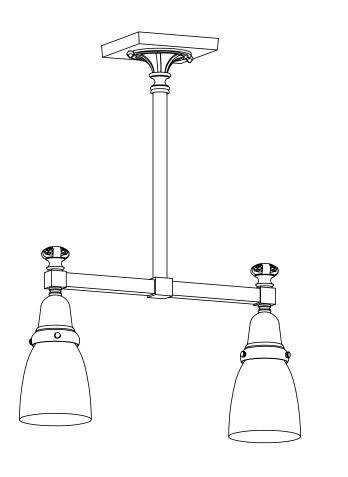

CN-576-A4-03M Shown with A157 shade(s)

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check our website for alternative 2-1/4" shades.

Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 12".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.


Made in USA by Brass Light Gallery.



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron








MORRIS™ TWO LIGHT PENDANT

WITH 2-1/4" SHADE HOLDERS UP

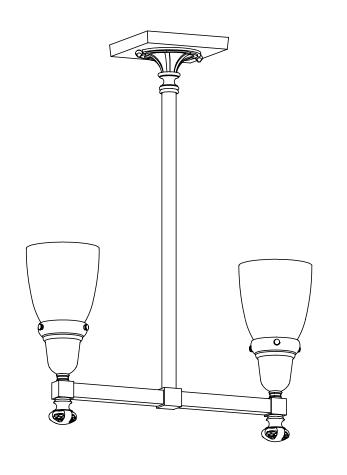

CN-576-A4-09M Shown with A157 shade(s)

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket a vailable. 277V 4 pin sock et alternative, inquire.

Check our website for alternative 2-1/4" shades.

Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 15".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.


Made in USA by Brass Light Gallery.



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron








MORRIS™ TWO LIGHT PENDANT

WITH ELECTRIC CANDLES

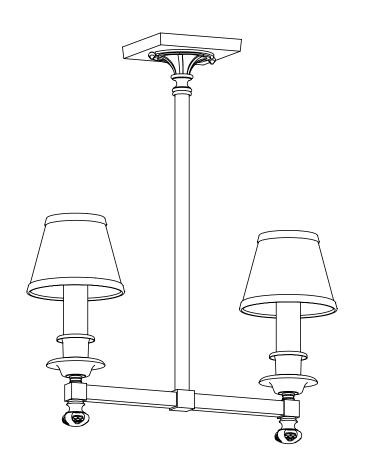




FINISHES - applied by hand.

Handmade in USA

Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



CN-576-K1-09M Shown with E231 shade(s)

Medium base screw-in sockets (2) each accept 60 W max incandescent, compact fluorescent, or LED.

 $\mbox{GU24 base} \mbox{ bi-pin socket a vailable. 277V } \mbox{4 pin sock et alternative, inquire.}$

Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.

Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 14".

Angled ceiling version available, inquire.

UL listed dry location.

Durably constructed of solid brass.

