WENTWORTH™ FAMILY INTERIOR LIGHTING


A Wentworth Family lighting fixture adds turn of the century lighting detail to your home or work place with its distinctive finial. This light fixture family is a good option for hallways, dining rooms, bathrooms and many more interior lighting applications.





































WENTWORTH™ ONE LIGHT STRAIGHT ARM SCONCE


WITH 2-1/4" SHADE HOLDER

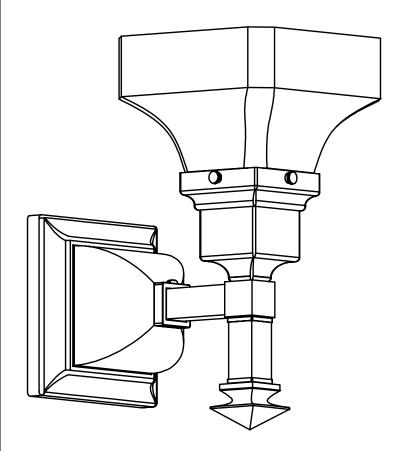



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



Medium base screw-in socket (1) accepts 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.


Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.

Durably constructed of solid brass.








WENTWORTH™ ONE LIGHT STRAIGHT ARM SCONCE


WITH ELECTRIC CANDLE

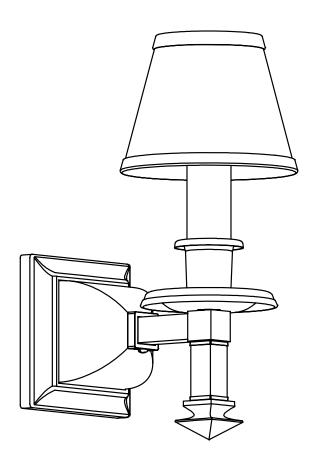



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



GR-104-B7 Shown with E220 shade(s)

Medium base screw-in socket (1) accepts 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.


Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.

Mounting plate center mounts to junction box.

Mount candle up.

UL listed dry location.


Durably constructed of solid brass.





WENTWORTH™ TWO LIGHT STRAIGHT ARM SCONCE


WITH 2-1/4" SHADE HOLDERS

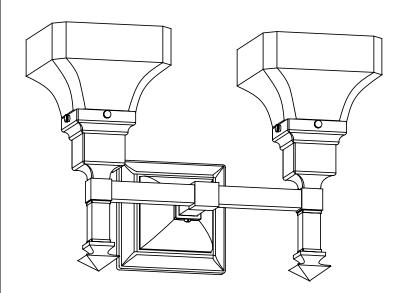



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



GR-105-B1 Shown with A105 shade(s)

Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.


Check our website for alternative 2-1/4" shades.

Mounting plate center mounts to junction box.

Mount glass up or glass down.

UL listed dry location. Damp location available, inquire.


Durably constructed of solid brass.





WENTWORTH™ TWO LIGHT STRAIGHT ARM SCONCE


WITH ELECTRIC CANDLES

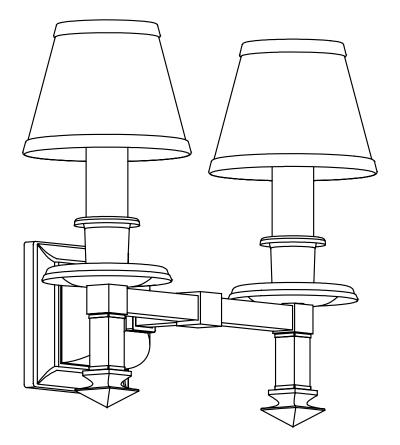



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



GR-105-B7 Shown with E220 shade(s)

Medium base screw-in sockets (2) each accept 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.


Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.

Mounting plate center mounts to junction box.

Mount candle up.

UL listed dry location.


Durably constructed of solid brass.





WENTWORTH™ TWO LIGHT CHANDELIER

WITH 2-1/4" SHADE HOLDERS

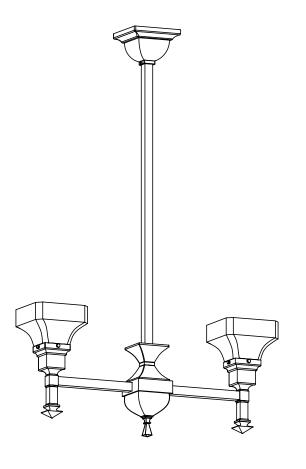



Medium base screw-in sockets (2) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.

Check our website for alternative 2-1/4" shades.

Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 15".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.


Made in USA by Brass Light Gallery.



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron








WENTWORTH™ TWO LIGHT CHANDELIER

WITH ELECTRIC CANDLES

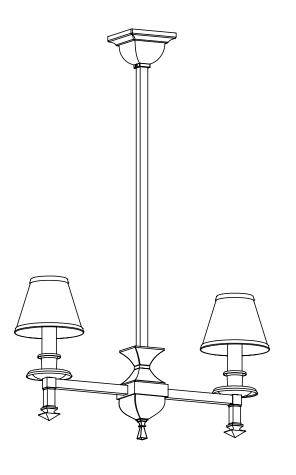

GR-426-B7-09M Shown with E210 shade(s)

Medium base screw-in sockets (2) each accept 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.

Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.

Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 18".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.


Made in USA by Brass Light Gallery.



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron








WENTWORTH™ FOUR LIGHT CHANDELIER


WITH 2-1/4" SHADE HOLDERS

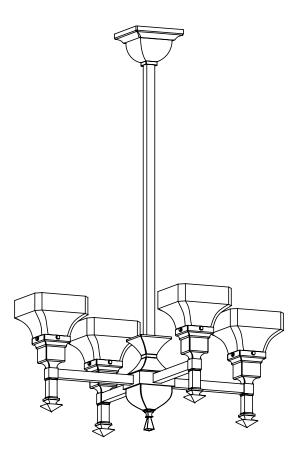



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



GR-427-B1-09M Shown with A105 shade(s)

Medium base screw-in sockets (4) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.

Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 15".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.





WENTWORTH™ FOUR LIGHT CHANDELIER


WITH ELECTRIC CANDLES

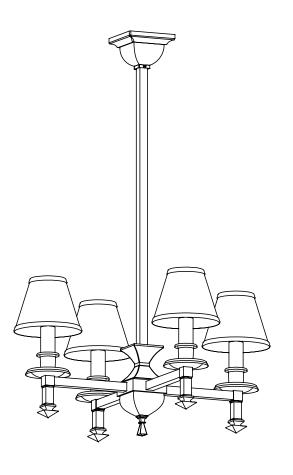



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



GR-427-B7-09M Shown with E210 shade(s)

Medium base screw-in sockets (4) each accept 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.

Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 18".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.





WENTWORTH™ TWELVE LIGHT TWO TIER CHANDELIER


WITH 2-1/4" SHADE HOLDERS

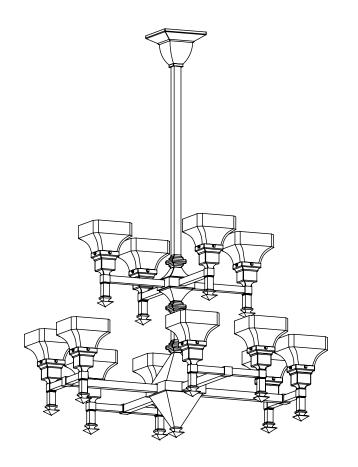



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



GR-448-B1-09M Shown with A105 shade(s)

Medium base screw-in sockets (12) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.

Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 28".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.





WENTWORTH™ TWELVE LIGHT TWO TIER CHANDELIER


WITH ELECTRIC CANDLES

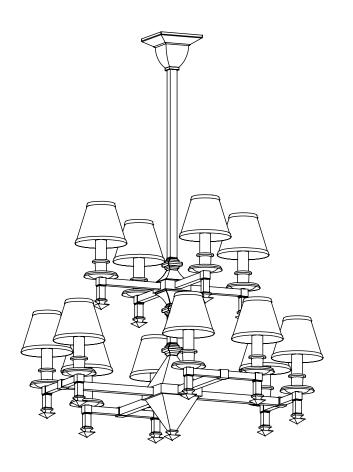



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



GR-448-B7-09M Shown with E210 shade(s)

Medium base screw-in sockets (12) each accept 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.

Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 29".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.





WENTWORTHTM TWELVE LIGHT LARGE TWO TIER CHANDELIER


WITH 2-1/4" SHADE HOLDERS

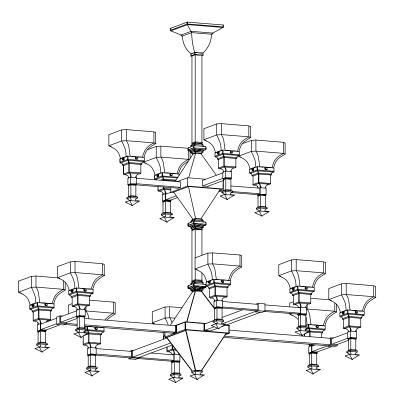



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



GR-455-B1-09M Shown with A105 shade(s)

Medium base screw-in sockets (12) each accept 150 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.

Check our website for alternative 2-1/4" shades.


Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 39".

Angled ceiling version available, inquire.

UL listed dry location.


Durably constructed of solid brass.





WENTWORTHTM TWELVE LIGHT LARGE TWO TIER CHANDELIER


WITH ELECTRIC CANDLES

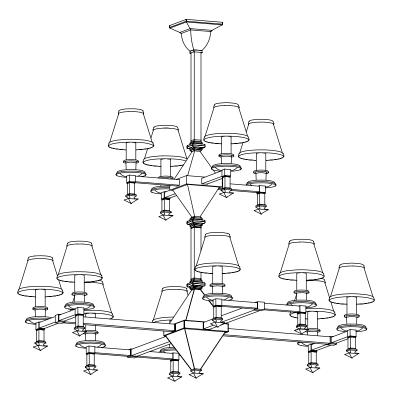



FINISHES - applied by hand.

Polished Nickel Brushed Nickel Black Brushed Brass Polished Brass Antique Nickel Vintage Nickel Architectural Bronze Verdigris Patina Distressed Brass Antique Copper Satin Antique Brass Unlacquered Pol. Brass Architectural Iron



GR-455-B7-09M Shown with E210 shade(s)

Medium base screw-in sockets (12) each accept 60 W max incandescent, compact fluorescent, or LED.

GU24 base bi-pin socket available. 277V 4 pin socket alternative, inquire.

Check online for alternative clip-on shades rated at 40 to 100 watts with this fixture.

Mounting plate center mounts to junction box.

Specify overall length. Minimum overall length 39".

Angled ceiling version available, inquire.

UL listed dry location.

Durably constructed of solid brass.

